

## FS DC INVERTER

The FS DC is the most versatile Inverter on the market. It's loaded at ground level by pallet truck or forklift. No ramp is required which reduces the footprint.

The FS DC is supplied with 2000mm high steel mesh guards as standard; with the option of extended guards and pedestrian access safety beam system.

Side bars allow fragile loads requiring reduced clamp pressure to be supported during inversion.



### USES INCLUDE




- Transfer product from wooden to plastic or other hygienic pallet
- Recovery of damaged bags or broken pallets from bottom of stack
- Switching to/from high quality in-house pallets
- Switching to/from one trip disposable pallets
- Recover used freezer spacers from stacks of frozen food
- Transfer to ISPM15 compliant pallets for export

### KEY FEATURES

- Standard machine will handle loads with a height of 740mm MIN up to 2000mm MAX
- Special models for taller loads
- Loading capacity 2000kgs
- Versatile - can be loaded by pallet truck or FLT
- Solenoid 'hold to run' push button control pendant
- Optional, space saving, high resolution safety beams
- Optional solid sidewall with ramp loading
- Optional stainless steel lining to inside of machine
- Ideal for in-line conveyor-fed applications



The FS DC in operation



# FS DC INVERTER

## Specifications

Usable Jaw Opening	2.00m max 0.74m min
--------------------	---------------------

*Increased jaw opening models also available*

Load Tables	Width 1.40m Depth 1.30m
-------------	-------------------------

Loading Capacity	2000 kgs
------------------	----------

Power Supply	3ph / 400V / 20A
--------------	------------------

Motor Size	4.0kW
------------	-------

Weight	2550 kgs
--------	----------

Weight of Guards	200 kgs
------------------	---------


Controls	Extended individual push button controls with semi or fully auto-sequenced systems available as an option
----------	--------------------------------------------------------------------------------------------------------------

Operating Space (including attached guards)	A	Width 2.86m
	B	Depth 2.20m
	C	Height 2.48m

*Depth increases to 3.31m when fitted with floor fixed guards and multi photo-beams*

Standard Shipping	Width 2.86m
Dimensions	Depth 2.20m
(with guards fitted)	Height 2.10m

SIDE ELEVATION

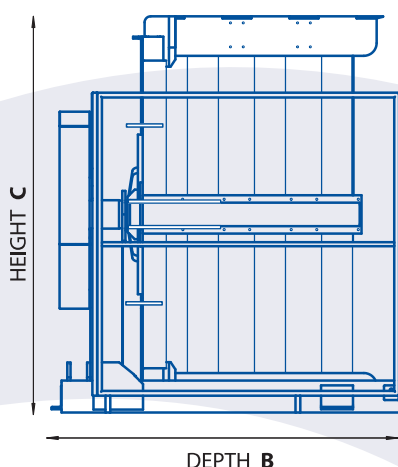

PLAN VIEW

